

LEMBAR
HASIL PENILAIAN SEJAWAT SEBIDANG ATAU *PEER REVIEW*
KARYA ILMIAH : PROSIDING

Judul Artikel : Eksperimental and Analytical Study of Displacement of Artificial Basilar Membrane (ABM) Prototype
 Nama Penulis : **Harto Tanujaya**
 Jumlah Penulis : 1 (tunggal)
 Status Pengusul : Penulis Tunggal
 Identitas Prosiding : a. Judul Prosiding : Seminar Nasional Teknik Mesin VI
 b. ISBN/ISSN : ISBN 978-979-25-4415-2
 c. Thn Terbit, Tempat : Surabaya, 16 Juni 2011
 d. Alamat Repository PT/Web Prosiding :
<https://linter.untar.ac.id/dokportofolio/9fb363683543c9e77e7e2822e9b6a937.pdf>
 e. Terindex di : -

Kategori Publikasi *Prosiding* Ilmiah (beri (√) pada kategori yang tepat)

☐ *Prosiding* Internasional
☒ *Prosiding* Nasional
☐ *Prosiding* Terindex Scopus

Hasil Penilaian *Peer Review*

Komponen Yang Dinilai	Nilai Maksimal <i>Prosiding</i> Ilmiah (isi di kolom yang sesuai)			Nilai Akhir <i>peer</i> Yang Diperoleh
	<i>Prosiding</i> Internasional	<i>Prosiding</i> Nasional	<i>Prosiding</i> Terindex	
Kelengkapan dan kesesuaian unsur isi <i>prosiding</i> (10%)		90% x 10% x 10		0,9
Ruang lingkup dan kedalaman pembahasan (30%)		92% x 30% x 10		2,76
Kecukupan & kemutakhiran data/informasi dan metodologi (30%)		93% x 30% x 10		2,79
Kelengkapan unsur & kualitas penerbit (30%)		94% x 30% x 10		2,82
Nilai <i>peer</i> Maksimal (100%)		10		9,27
Kontribusi Pengusul; (nilai akhir <i>peer</i> x bobot penulis tunggal = 9,27 x 100% = 9,27)				9,27
Komentar/Usulan <i>Peer Review</i> : (Terlampir hal. 2)	1. Tentang kelengkapan dan kesesuaian unsur: 2. Tentang ruang lingkup dan kedalaman pembahasan; 3. Kecukupan dan kemutakhiran data/informasi dan metodologi; 4. Kelengkapan unsur dan kualitas penerbit: 5. Indikasi Plagiasi: 6. Kesesuaian Bidang Ilmu: <i>Terlampir</i>			

Jakarta, 18.12. 2019
 Penilai I



(Prof. Dr. Ir. Agustinus Purna Irawan)
 NIDN/NIP : 0328087102 / 10398021
 Jabatan/Pangkat/Bidang Ilmu: Professor/IVC/Teknik Mesin
 Unit Kerja: Fakultas Teknik – Universitas Tarumanagara

KOMENTAR PEER REVIEW	1. Tentang kelengkapan dan kesesuaian unsur: Artikel dengan judul Eksperimental and Analytical Study of Displacement of Artificial Basilar Membrane (ABM) Prototype, ditulis secara benar sesuai dengan standar penulisan artikel ilmiah yang memuat pendahuluan, metode/peralatan yang digunakan, pengambilan data dan data, analisa dan kesimpulan. 2. Tentang ruang lingkup dan kedalaman pembahasan: Artikel tersebut membahas mengenai analisa uji eksperimental getaran prototype membran ABM, dibahas secara spesifik dan mudah dipahami. 3. Kecukupan dan kemutakhiran data/informasi dan metodologi; Metodologi terstruktur dan jelas, data dan referensi yang diambil up to date. 4. Kelengkapan unsur dan kualitas penerbit: Kepanitiaan, reviewer makalah dan penyelenggara seminar jelas dan terdokumentasi. Artikel didalam prosiding ber ISBN/ISSN dan dapat dibaca melalui daring. 5. Indikasi Plagiasi: Artikel dengan judul Eksperimental and Analytical Study of Displacement of Artificial Basilar Membrane (ABM) Prototype yang dipresentasikan Seminar Nasional Teknik Mesin VI pada tanggal 16 Juni 2011 di Surabaya dan diselenggarakan oleh Jurusan Teknik Mesin, Universitas Kristen Petra, Surabaya, dapat dibaca secara daring dan tidak ditemukan indikasi plagiasi dengan tingkat kesamaan menggunakan software Turnitin sebesar 14 %. https://linter.untar.ac.id/dokportofolio/9fb363683543c9e77e7e2822e9b6a937.pdf 6. Kesesuaian Bidang Ilmu: Artikel tersebut membahas tentang analisa dari pengujian secara eksperimental getaran prototype membran ABM dan ada Linieritas keilmuan dengan pengusul.
---------------------------------	---

Jakarta, 18.12. 2019
Penilai I



(Prof. Dr. Ir. Agustinus Purna Irawan)
NIDN/NIP : 0328087102 / 10398021
Jabatan/Pangkat/Bidang Ilmu: Professor/IVC/Teknik Mesin
Unit Kerja: Fakultas Teknik – Universitas Tarumanagara

LEMBAR
HASIL PENILAIAN SEJAWAT SEBIDANG ATAU *PEER REVIEW*
KARYA ILMIAH : PROSIDING

Judul Artikel : Eksperimental and Analytical Study of Displacement of Artificial Basilar Membrane (ABM) Prototype
 Nama Penulis : **Harto Tanujaya**
 Jumlah Penulis : 1 (tunggal)
 Status Pengusul : Penulis Tunggal
 Identitas Prosiding : a. Judul Prosiding : Seminar Nasional Teknik Mesin VI
 b. ISBN/ISSN : ISBN 978-979-25-4415-2
 c. Thn Terbit, Tempat : Surabaya, 16 Juni 2011
 d. Alamat Repository PT/Web Prosiding : <https://lintar.untar.ac.id/dokportofolio/9fb363683543c9e77e7e2822e9b6a937.pdf>
 e. Terindex di : -

Kategori Publikasi *Prosiding* Ilmiah (beri (√) pada kategori yang tepat)

☐ *Prosiding* Internasional
☒ *Prosiding* Nasional
☐ *Prosiding* Terindex Scopus

Hasil Penilaian *Peer Review*

Komponen Yang Dinilai	Nilai Maksimal <i>Prosiding</i> Ilmiah (isi di kolom yang sesuai)			Nilai Akhir Yang Diperoleh
	<i>Prosiding</i> Internasional	<i>Prosiding</i> Nasional	<i>Prosiding</i> Terindex	
Kelengkapan dan kesesuaian unsur isi <i>prosiding</i> (10%)		1		0,9
Ruang lingkup dan kedalaman pembahasan (30%)		3		2,79
Kecukupan & kemutakhiran data/informasi dan metodologi (30%)		3		2,79
Kelengkapan unsur & kualitas penerbit (30%)		3		2,82
Total = 100%		10		9,3
Kontribusi Pengusul; (nilai akhir <i>peer</i> x penulis tunggal = 9,3 x 100% = 9,3				9,3
Komentar/Usulan <i>Peer Review</i> :	1. Tentang kelengkapan dan kesesuaian unsur; 2. Tentang ruang lingkup dan kedalaman pembahasan; 3. Kecukupan dan kemutakhiran data/informasi dan metodologi; 4. Kelengkapan unsur dan kualitas penerbit; 5. Indikasi Plagiasi; 6. Kesesuaian Bidang Ilmu: <i>Terlampir</i>			

Jakarta, 14-11-2019
 Penilai

(Dr. Ir. M. Sobron Yamin L., M.Sc.)
 NIDN/NIP : 0114056705 / 10311009
 Jabatan/Pangkat/Bidang Ilmu: Lektor Kepala/IV/Teknik Mesin
 Unit Kerja: Fakultas Teknik – Universitas Tarumanagara

KOMENTAR PEER REVIEW	1. Tentang kelengkapan dan kesesuaian unsur: Artikel Eksperimental and Analytical Study of Displacement of Artificial Basilar Membrane (ABM) Prototype, sesuai dengan kaidah penulisan artikel ilmiah yang meliputi pendahuluan, metode/alat, data dan analisa serta kesimpulan. 2. Tentang ruang lingkup dan kedalaman pembahasan: Ruang lingkup pembahasan artikel tersebut tentang uji eksperimental getaran membran ABM, dengan kedalaman pembahasan yang spesifik. 3. Kecukupan dan kemutakhiran data/informasi dan metodologi; Data yang diambil dan digunakan untuk analisa dan referensi tergolong baru dan mutakhir, dengan susunan metodologi yang baik. 4. Kelengkapan unsur dan kualitas penerbit: Penerbit dan penyelenggara seminar bergerak dalam dunia pendidikan dan sering mengadakan acara seminar/konferensi berskala nasional/internasional. Editor/ketua panitia dan reviewer untuk makalah tersusun jelas. Prosiding ber ISBN/ISSN dan dapat dilihat secara online. 5. Indikasi Plagiasi: Artikel Eksperimental and Analytical Study of Displacement of Artificial Basilar Membrane (ABM) Prototype yang dipresentasikan pada tanggal 16 Juni 2011 di Seminar Nasional Teknik Mesin VI di Surabaya dan diselenggarakan oleh Jurusan Teknik Mesin, Universitas Kristen Petra, Surabaya, dapat dibaca secara daring dan tidak ditemukan indikasi plagiasi https://lintar.untar.ac.id/dokportofolio/9fb363683543c9e77e7e2822e9b6a937.pdf 6. Kesesuaian Bidang Ilmu: Artikel Eksperimental and Analytical Study of Displacement of Artificial Basilar Membrane (ABM) Prototype dengan pembahasan tentang analisa uji eksperimental getaran prototype membran ABM sesuai dan linier dengan bidang ilmu pengusul.
---------------------------------	---

Jakarta,
Penilai II

2019

(Dr. Ir. M. Sobron Yamin L., M.Sc.)

NIDN/NIP : 0114056705 / 10311009

Jabatan/Pangkat/Bidang Ilmu: Lektor Kepala/IV/Teknik Mesin

Unit Kerja: Fakultas Teknik – Universitas Tarumanagara

EXPERIMENTAL AND ANALYTICAL STUDY OF DISPLACEMENT OF ARTIFICIAL BASILAR MEMBRANE (ABM) PROTOTYPE

Hario Junjayadi
Jurusan Teknik Mesin, Fakultas Teknik
Universitas Tarumanagara
Jl. Lestari S. Pajam No. 1, Jakarta 11440
Email: hario_jun18@yahoo.com, hario@tarumanagara.ac.id

Abstract

In this research, we report and analyze the prototype of artificial basilar membrane (ABM) which works using simulated wave and also various frequency. Design and dimension of the prototype was chosen using trapezoidal shape with 10 mm length and 2 mm to 4 mm width. Experimentally, the vibration of artificial basilar membrane is measured using Laser Doppler Vibrometer (LDV). The main results, the resonant frequencies of the prototype of ABM are showed can be reached in the range of human ears, between 20 Hz to 20 kHz.

Keywords: Artificial basilar membrane, cochlea, resonance frequency, frequency selectivity

1 INTRODUCTION

Hearing is one of the important sense of human to interact each others. One of the important organ of hearing is cochlea. Cochlea are located in the inner ear. In the normal hearing, sound wave from the environment outside the outer ear, travel through the ear canal and strike the eardrum. Vibration of this eardrum causes the three bones that are located in the middle ear vibrate; this vibration will cause the fluid in the cochlea oval thiminate which are enhance the basilar membrane to oscillated [1]. The basilar membrane is one of membrane in the cochlea. This membrane is worked as the frequency selectivity of the sound wave.

At present, the deafaid of cochlear implant consists of two parts, there are implantable stimulating electrodes and an extracorporeal device which are necessary body in this system. Implantable stimulating electrodes consist of receiver and electrodes. In the extracorporeal device, there are batteries, processor and microphone as shown in Fig 1. This condition is inconvenient for the user. This situation motivates us to develop a fully self contained artificial cochlea. In this research, we report and analyze a prototype of artificial basilar membrane (ABM) analytically and experimentally. The ABM is one of the important part in the artificial cochlea.

2 MECHANICAL MODEL AND METHODODOLOGY

The actual shape of the cochlea is coiled and has a




Figure 1 Present Implantable Cochlea

separated by a flexible membrane structure corresponding to the prototype of ABM. Thickness of the ABM prototype is 40 μ m with the PVDI material. The shape of the membrane is trapezoidal channel with the width of the channel is proportional 2 mm to 4 mm with 30 mm along longitudinal direction as shown in figure 2. The Young's modulus and density of the membrane are 4 GPa and 1790 kg/m³ respectively. The acoustic wave is generated using a speaker (FORTEK, Japan). Distance between speaker and the prototype is 120 mm. Voltage of the speaker is adjusted using function generator to get the constant sound pressure at 75 and 80 dB. The frequency is controlled from 1 kHz to 20 kHz.

Match Overview

14%

1	media.neliti.com General Science	11%
2	White, Robert D., and K... Introduction	3%

SEMNAS PETRA

ORIGINALITY REPORT

14%

SIMILARITY INDEX

13%

INTERNET SOURCES

5%

PUBLICATIONS

3%

STUDENT PAPERS

PRIMARY SOURCES

1

media.neliti.com

Internet Source

8%

2

White, Robert D., and Karl Grosh. "", Smart Structures and Materials 2002 Smart Electronics MEMS and Nanotechnology, 2002.

Publication

3%

3

S. Mitterhofer, J. D. Puhlinger, V. Schlosser. "An acoustic set up for the vibration analysis of silicon wafers", IECON 2013 - 39th Annual Conference of the IEEE Industrial Electronics Society, 2013

Publication

3%

Exclude quotes On

Exclude bibliography On

Exclude matches < 3%

SEMNAS PETRA

by Fakultas Teknik

Submission date: 06-Dec-2019 12:15PM (UTC+0700)

Submission ID: 1228361637

File name: osiding_SEMNAS_6_Petra_Experimental_and_Analytical_Study_off.pdf (834.46K)

Word count: 1272

Character count: 6535

PROSIDING

SEMINAR NASIONAL

TEKNIK MESIN 6

B.1.8



Penemuan dan Inovasi Teknik Mesin Dalam
Pengembangan Industri Nasional

16 JUNI 2011

UNIVERSITAS KRISTEN PETRA
SURABAYA

Tim Editor:

Hariyo P. S. Pratomo, ST.,MPhil

Roche Alimin, ST.,MEng



Penerbit

JURUSAN TEKNIK MESIN

FAKULTAS TEKNOLOGI INDUSTRI

UNIVERSITAS KRISTEN PETRA

Jl. Siwalankerto 121-131 Surabaya 60236

PROSIDING SEMINAR NASIONAL TEKNIK MESIN VI

"Penemuan dan Inovasi Teknik Mesin dalam Pengembangan Industri Nasional".
Surabaya, 16 Juni 2011

Hak Cipta © 2011 oleh SNTM VI
Jurusan Teknik Mesin
Universitas Kristen Petra

Dilarang mereproduksi, mendistribusikan bagian atau seluruh naskah publikasi ini dalam segala bentuk apapun tanpa seijin Jurusan Teknik Mesin Universitas Kristen Petra.

Dipublikasikan dan didistribusikan oleh:
Jurusan Teknik Mesin
Universitas Kristen Petra
Jl. Siwalankerto 121 – 131
Surabaya 60236
INDONESIA

ISBN: 978-979-25-4415-2

- MENGEMBANGKAN *PREDICTIVE MAINTENANCE ENGINE SHIPS* (ACHM ZUBAYDI)HAL
13. OUSSAMA KHATIB'S *OPERATIONAL SPACE FORMULATION FOR SERIAL RO MAIPULATOR* (DANDY B. SOEWANDITO)HAL

KONVERSI ENERGI

14. EXPERIMENTAL AND ANALYTICAL STUDY OF DISPLACEMENT ARTIFICIAL BASILAR MEMBRANE (ABM) PROTOTYPE (HARTO TANUJA)HAL 82
15. PERFORMANCE TEST ON VAC SYSTEM OF UPS BUILDING (TO SUPRIYONO)HAL
16. SINTESIS BAHAN KERAMIK BERBASIS ABU TERBANG HASIL INSINER SAMPAH (ATHANASIOUS P. BAYUSENO)HAL 90
17. ANALISIS REGRESI METODE PARAMETRIK PADA KARAKTERISASI BEE PENDINGINAN TERHADAP BIAYA PEMBUATAN DALAM DESAIN CO STORAGE MENGGUNAKAN PANEL SURYA (BONI SENA)HAL
18. PENGUJIAN KARAKTERISTIK PERPINDAHAN PANAS DAN FAKT GESEKAN PADA PENUKAR KALOR PIPA KONSENTRIK DENGAN *HAL LENGTH* DAN *FULL LENGTH TWISTED TAPE INSERT* (TRI ISTANTO)HAL
19. SIMULASI NUMERIK UNTUK PERPINDAHAN PANAS KONVEKSI ALIF UDARA DI SEKITAR *OBSTACLE* BERBENTUK PERSEGI PANJANG (EKADE A. HANDOYO)HAL
20. UJI EXPERIMENTAL ROTOR *HELICAL SAVONIUS* DIBANDINGKAN DENGAN ROTOR SAVONIUS (MOHAMMAD ALEXIN PUTRA)HAL
21. PRESSURE DROP ALIRAN DIDALAM *RECTANGULAR ELBOW 90°* DENGAN *GUIDE VANE* PADA $RE = 140000$ (SUTARDI)HAL
22. APLIKASI SISTEM DUAL FUEL BENSIN DAN SYN GAS HASIL GASIFIK BIOMASSA PADA MOTOR BENSIN STASIONER UNTUK PEMBANG LISTRIK (BAMBANG SUDARMANTA)HAL
23. ANALISA KEGAGALAN KEBOCORAN PIPA 8 INCHI PADA INSTALASI PENGOLAHAN GAS ALAM (BENY BANDANADJAJA)HAL
24. ANALISA TEORITIS POMPA KALOR TEMPERATUR TINGGI BERBANTU PEMANAS ENERGI SURYA (DJUANDA)HAL

1 EXPERIMENTAL AND ANALYTICAL STUDY OF DISPLACEMENT OF ARTIFICIAL BASILAR MEMBRANE (ABM) PROTOTYPE

Harto Tanujaya

Jurusan Teknik Mesin, Fakultas Teknik
Universitas Tarumanagara

Jl. Letjen S. Parman No. 1, Jakarta 11440

Email: hart_tan18@yahoo.com, harto@tarumanagara.ac.id

Abstract

1 In this research, we report and analyze the prototype of artificial basilar membrane (ABM) which works using sinusoidal wave and also various frequency. Design and dimension of the prototype was chosen using trapezoidal shape with 30 mm length and 2 mm to 4 mm width. Experimentally, the vibration of artificial basilar membrane is measured using Laser Doppler Vibrometer (LDV). The main result, the resonance frequencies of the prototype of ABM are showed can be reached in the range of human audio, between 20 Hz to 20 kHz.

Keywords: Artificial basilar membrane, cochlea, resonance frequency, frequency selectivity

1 INTRODUCTION

Hearing is one of the important sense of human to interact each others. One of the important organ of hearing is cochlea. Cochleae are located in the inner ear. In the normal hearing, sound wave from the environment outside the outer ear, travel through the ear canal and strike the eardrum. Vibration of this eardrum causes the three bones that are located in the middle ear vibrate, this vibration will cause the fluid in the cochlear duct fluctuate which are influence the basilar membrane to oscillated [1]. The basilar membrane is one of membrane in the cochlea. This membrane is worked as the frequency selectivity of the sound wave.

At present, the deafaid of cochlear implant consists of two parts, there are implantable stimulating electrodes and an extracorporeal device which are necessary tools in this system. Implantable stimulating electrodes consist of receiver and electrodes. In the extracorporeal device, there are batteries, processor and microphone as shown in Fig 1. This condition is inconvenient for the user. This situation motivates us to develop a fully self contained artificial cochlea. In this research, we report and analyze a prototype of artificial basilar membrane (ABM) analytical and experimental-ly. The ABM is one of the important part in the artificial cochlea.

2 MECHANICAL MODEL AND METHODOLOGY

The actual shape of the cochlea is coiled and has a little more than 2.5 turns [2]. With the purpose of the modeling and simplifying the model of the biologi basilar membrane, the prototype of ABM can be unwrapped. Figure 2 shows the model geometric of ABM prototype. In the figure of cross section A-A, there are two channels upper and lower side of the membrane which are considered as like a scala vestibule and a scala tympani in biologi cochlea. Those channels are

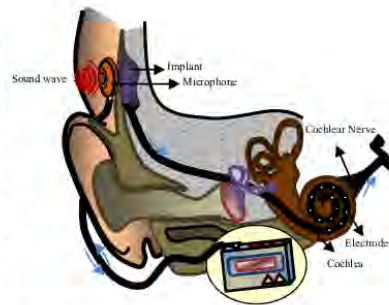


Figure 1. Present Implantable Cochlear

2 separated by a flexible membrane structure corresponding to the prototype of ABM. Thickness of the ABM prototype is 40 μm with the PVDF material. The shape of the membrane is trapezoidal channel with the width of the channel is proportional 2 mm to 4 mm with 30 mm along longitudinal direction as shown in figure 2. The Young's modulus and density of the membrane are 4 GPa and 1790 kg/m^3 respectively. The acoustic wave is generated using a speaker (FORTEX, Japan). Distance between speaker and the prototype is 120 mm. Voltage of the speaker is adjusted using function generator to get the constant sound pressure at 75 and 80 dB. The frequency is controlled from 3 kHz to 20 kHz.

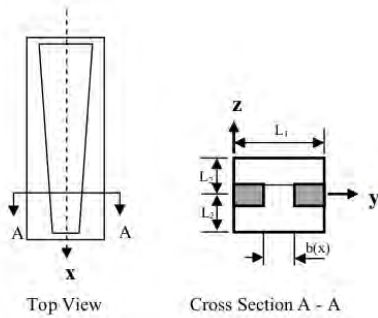


Figure 2. Model geometric of the artificial basilar membrane prototype

The vibration is measured using laser Doppler vibrometer (LDV) to measure the frequency-dependence of the oscillation of ABM prototype. Lower resonance frequency is expected at the wider side, where as larger one is at narrower one [3].

3. RESULTS AND DISCUSSIONS

Kirchhoff's hypotheses are fundamental assumptions in the development of linear, elastic, small-deflection theory for the bending of thin plates [4].

The vibrating of the ABM prototype can be predict by the thin plate bending model. The direction of the shearing force and balance of the moment bending are shown in figure 3.

Method of Wentzel Kramer Brillouin (WKB) also was used to solve the equations of the mechanism in ABM problem where parameters vary slowly compared to the wavelength of oscillations. Solution of the vibration on ABM response assumed with slowly varying amplitude. Interaction between the fluid and ABM is governed by linearized Euler equation. Asymptotic expansions are used in analysis to describe the behavior of a function in a limiting situation. Based on the plate bending theory, the basic equation of displacement of the ABM can be predicted using,

$$\frac{Eh^3}{12(1-\nu^2)} \left(\frac{\partial^4 w}{\partial x^4} + 2 \frac{\partial^2 w}{\partial x^2 \partial y^2} + \frac{\partial^4 w}{\partial y^4} \right) + \rho h \frac{\partial^2 w}{\partial t^2} = 0 \quad (1)$$

Parameters,

w : Displacement	[m]
E : Young's modulus	[4 GPa]
h : Thickness of membrane	[40 μ m]
ρ : Density	[1790 kg/m ³]
ν : Poisson's ratio	[0.3]

Figure 4 shows the shape of the experimental data graph of the single cross mode. In that graph the gradient line is showed along of the side of the ABM, this indicate that the vibration of the membrane have two gradient boundary conditions at the left and right side of the ABM prototype.

Figure 5 shows contour map of the ABM prototype at frequency 9000 Hz. The biggest magnitudes are occurred at the distance 19 mm from the narrower one.

Figure 6 shows the resonance frequencies along of the ABM at 75 and 80 dB. Distribution of the resonance frequency at the both experiment are around the teoretical resonance frequency line. It



Figure 3. Direction of the shearing force and balance of the moment bending

is explain that the comparison between frequency selectivity and local resonance frequency based on the plate bending theory solved by WKB asymptotic method reasonable. The results of both experiment also show that the local resonance frequency on the ABM prototype has a small change at the several point.

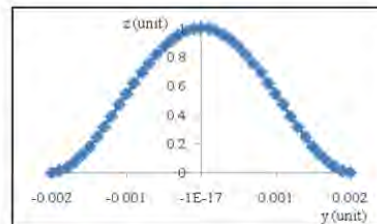


Figure 4. Shape of the Experimental Graph of the Single Cross Mode

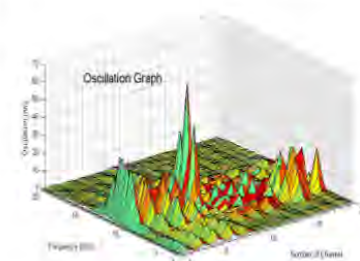


Figure 5. Contour map of the ABM prototype Resonance frequency at 9 kHz

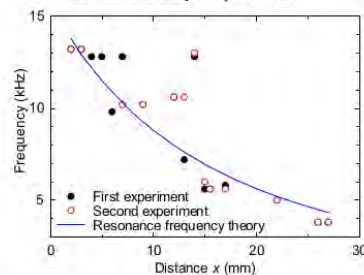


Figure 5. Resonance frequency along of the ABM at 75 dB - first experiment and 80 dB - second experiment

4. CONCLUSIONS

Distribution of the resonance frequency value of ABM showed around the theory line. This indicate that the resonant frequency theory can be used in this experiment.



The frequency selectivity is occurred by the local resonance of the oscillation of the ABM. The prototype of ABM realizes the frequency selectivity in the range of audible frequency. The frequency of the ABM increases from 3 kHz ~ 12 kHz with decreasing the position of x.

ACKNOWLEDGEMENT

Thanks to the Kawano Laboratory members, Osaka University – Japan.

REFERENCES

- [1] Zwislöck, Josef J., *Auditory sound transmission; an autobiographical perspective*, Lawrence Erlbaum Associates Inc., New Jersey, USA, 2002.
- [2] Møller, Aage R., *Hearing, second edition : Anatomy, Physiology and disorders of the auditory system*, 2 nd edition, Elsevier, USA, 2006
- [3] Tanujaya, H., Shintaku, H., Kanbe, T., Nakamoto, Y., Kawano, S., Nakagawa, T. and Ito, J., *Development of Artificial Cochlea Using Microfabrication Method Based on P(VDF-TrFE)*, Proceeding of The Sixth International Conference on Flow Dynamics, pp. 270-271, November 4 – 6, 2009.
- [4] Ventsel E. and T. Krauthammer, *Thin Plates & Shells: Theory, Analysis & Applications*, Marcel Dekker, Inc., NY, 2001.



Sertifikat



Diberikan kepada

Harto Tanujaya, ST, MT, Ph.D

Atas partisipasinya sebagai

PEMAKALAH


dalam

SEMINAR NASIONAL
TEKNIK MESIN 6


Penemuan dan Inovasi Teknik Mesin Dalam Pengembangan Industri Nasional

Surabaya, 16 JUNI 2011

Ketua Jurusan Teknik Mesin


Fandi D. Suprianto ST., MSc.

Ketua Panitia


Ir. Joni Dewanto MS.
ST. JAWAB PERKATA